


# ANCILLARIES

## TYPE: Saddle Adaptors - SA

SPECIAL NOTE: Use left hand size line for throw. Right hand size line for Noise/pressure.  
Throw values based on an isothermal application, to a terminal velocity of 0.25m/s with straight vanes.

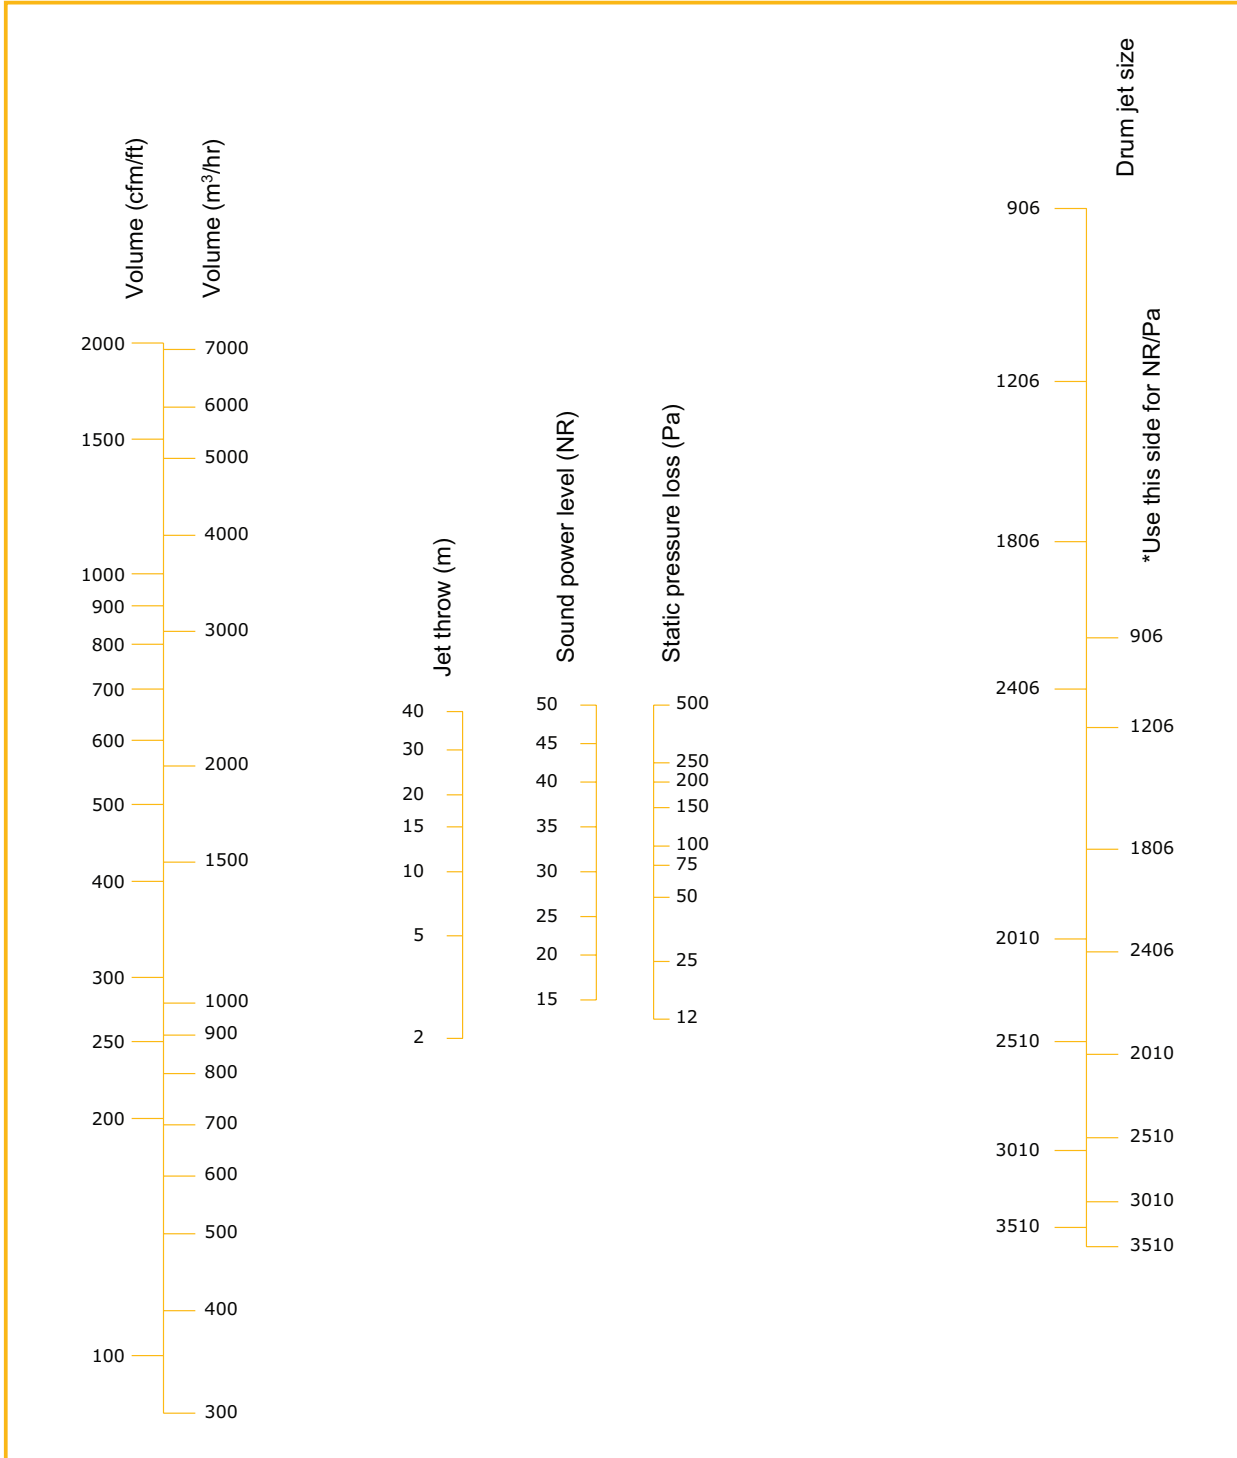

Throw correction factors							
Vane angle	0°	5°	10°	20°	30°	40°	50°
Throw factor	1	0.9	0.82	0.68	0.6	0.52	0.4